



## Technical data

Function	CI-200	CI-500	CI-800
Main water pump (l/min.)	200	500	800
Chlorine Vol. (adj.) (cc./min.)	1.0 - 8.0	5.0 - 25.0	5.0 - 40.0
Water pressure (PSI max)	Up to 35	Up to 35	Up to 35
Electric supply	220V-240 VAC 50/60 Hz	220 VAC 50 Hz	220 VAC 50 Hz
Power (watt)	12	25	25
pH condition	pH 5 - 9	pH 5 - 9	pH 5 - 9
Suction capability (meters)	Max 1.50	Max 1.50	Max 1.50

## Introduction

Chlorine Injector **JRL** is designed for “direct injection” Chlorine solution (10%) into water supply system. **JRL** is very easy to set and operate. **JRL** less maintenance.


## Specification

**JRL** Cl-injector is suitable to operate with water supply system. Pressure in line is up to 35 PSI

**JRL** Cl-injector has 3 models to matching with water supply pump capacity. Model CI-200, CI-500 and CI-800. All model is direct injection Chlorine solution into the water supply system.

## Distributor:

## Installation diagram

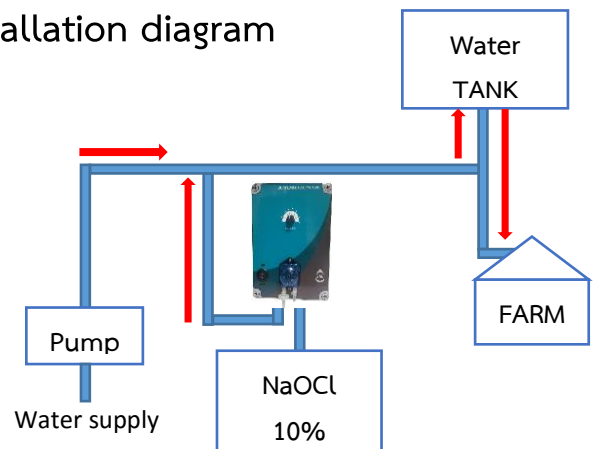

AGRAINNOVATE COMPANY LIMITED

1469/1 Moo 6 Tambon Teparak Muang Samut Prakarn Samut  
Prakarn 10270 THAILAND

T: +66 81 642 5140

www.jrllsiam.com

E-Mail: info@jrllsiam.com

Products of THAILAND